


额定载荷	A	B	C	D
50~750kg	51	76.2	19.1	M12
1t	51	76.2	25.4	M12
1.5~5t	76.2	100.4	31.8	M20X1.5

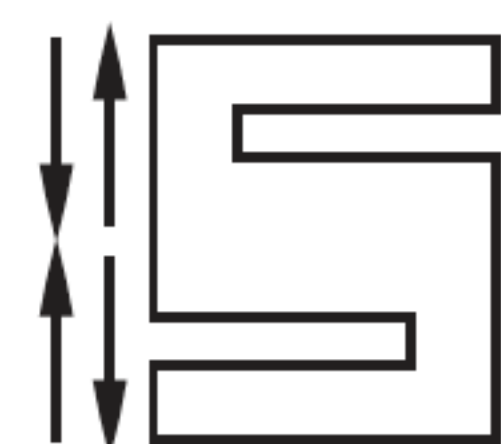

吊钩秤、皮带秤、配料系统
Crane scale, belt scale, blending system

TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated load	50,100,150,200,250,300,500,750kg ,1t,1.5t,2t,3t,5t,7.5t	输出阻抗 Output resistance	352 ± 5 Ω
精度等级 Accuracy class	0.03	绝缘电阻 Insulation resistance	≥ 5000 MΩ
灵敏度 Sensitivity	2.0 ± 0.003mV/V(DEE) 3.0 ± 0.003mV/V(DEF)	额定温度 Nominal Temp Range	-10~+40℃
线性误差 Non-linearity	± 0.03%F.S	工作温度范围 Service Temp Range	-30~+70℃
滞后误差 Hysteresis error	± 0.03%F.S	安全负载 Safe load limit	150%F.S
蠕变 (30分钟) Creep(30min)	± 0.03%F.S	破坏负载 Breaking load	200%F.S
零点温度影响 TC ZERO	± 0.02%F.S/10℃	额定激励电压 Nominal of range excitation	10~12 V DC
灵敏度温度影响 TC SPAN	± 0.02%F.S/10℃	密封等级 Protection Class	IP66(50kg~1t) ,IP67(1.5t~5t)
输入阻抗 Input resistance	400 ± 20 Ω (1.5t~5t)	材料 Material	合金钢 Alloy Steel, 不锈钢 Stainless steel
		电缆 Cable	Length=3m